

ASPHALT EDGE TO BE RE-COMPACTED AND
 LEVELLED AFTER ASPHALT REMOVAL AND PRIOR
 TO THE PLACEMENT OF THE CONCRETE COLLAR


1 1/2" MINIMUM NON-FERROUS
 CAP (NOTE 2)

P.C.C. COLLAR
 (NOTE 4 & 5)

SURVEY BOX AND DEEP SEAT
 COVER MARKED "SURVEY"
 (D&L M-8046 AND M-8056,
 OR EQUAL)

8"
 MIN.

4"-6"
 MAX.
 6"
 MIN.

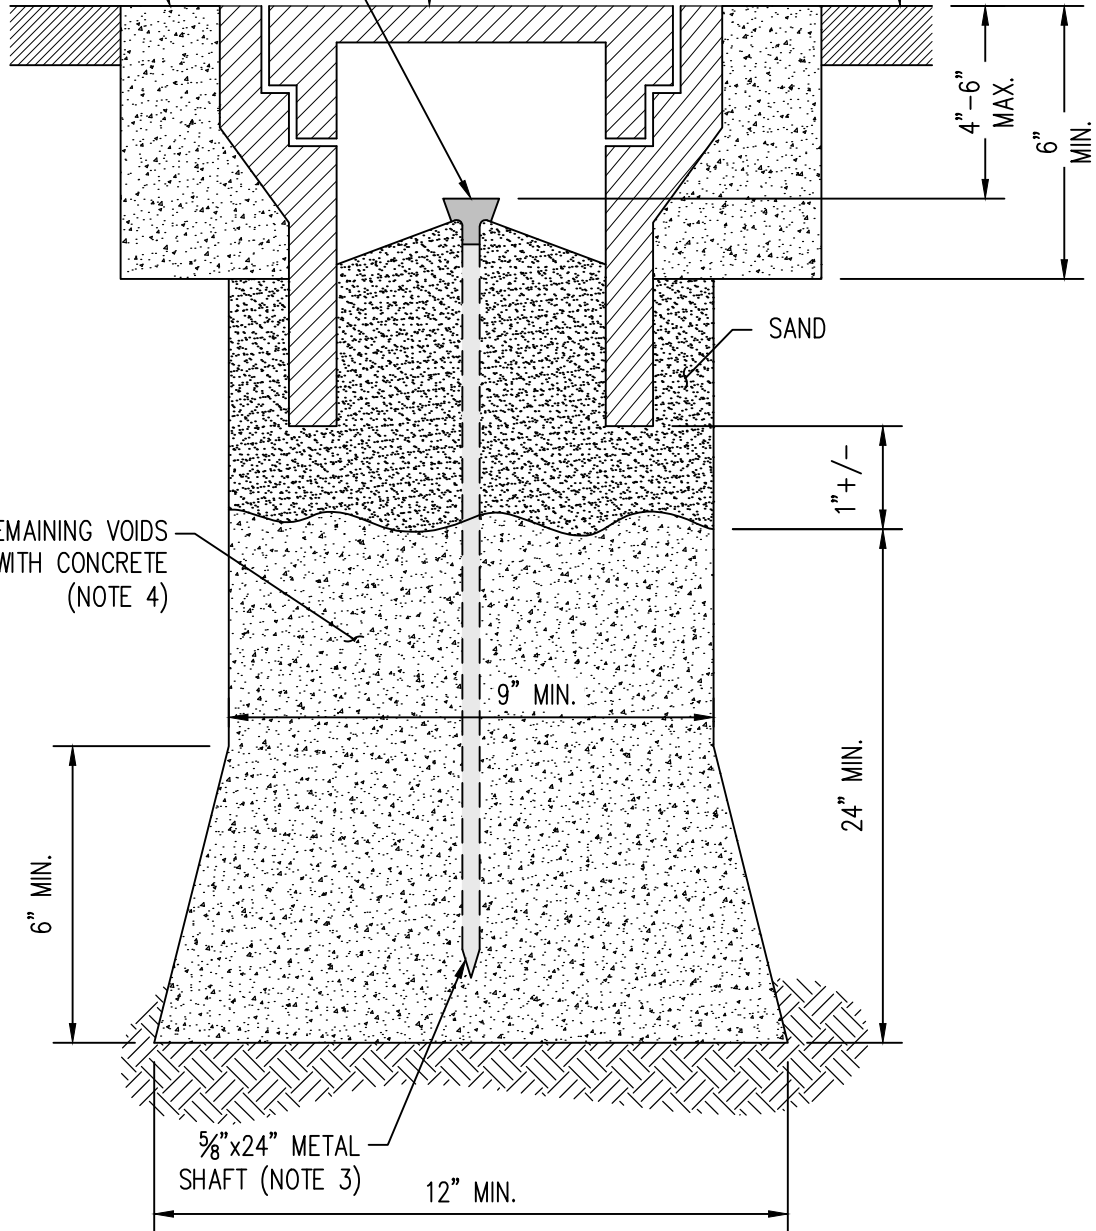

SAND

FILL REMAINING VOIDS
 WITH CONCRETE
 (NOTE 4)

1" +/-

9" MIN.

24" MIN.

6" MIN.

5/8" x 24" METAL
 SHAFT (NOTE 3)

12" MIN.

DATE	REVISIONS



STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION
 MONUMENTS

SECTION NUMBER: 100
DRAWING NUMBER: W-151A
DATE: 2/21/2022